


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER JACKET MATERIAL/COLOR	PVC/GRAY			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	5x22 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

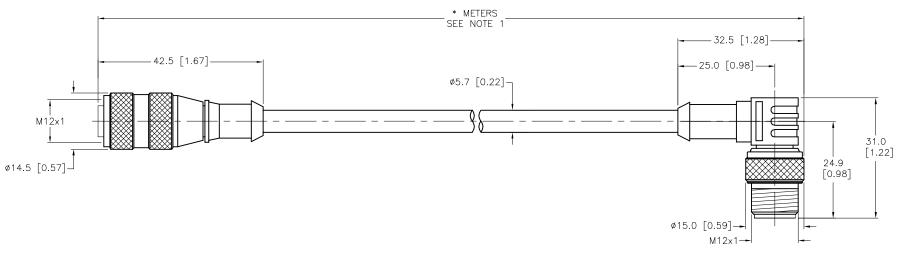

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

TOLEDANGE *

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769

FILE: 777000631

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	
1. 2. 3. 4.	\oint \land \land		
MATERIAL		DRFT JBJ	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	
FINISH	CONTACT TURCK	MILLIMETE	

DATE 09/06/00 DESCRIPTION JBJ SCALE 1 = 1

(763) 553-0708 fax www.turck.us

(763) 553-7300

SHEET 1 OF 1

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DESCRIPTION	RK	4.5T-*-WS	4.5T	
IDENTIFICATION	NO.			REV
				F

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

CARLE LENGTH

\vdash	_	UPDATE MALE COUPLING NUT	DDC	04/24/18	56902
┖	1	UPDATE MALE COUPLING NUT	KDS	04/24/10	30902
R	EV	DESCRIPTION	BY	DATE	ECO NO.

FOR MORE INFORMATION SEE SPECIFICATIONS DO NOT SCALE THIS DRAWING